


LED Neon Flex Series

Top View-S: 10X10

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With
invisible light dots.
Perfect softness,gentle emitting,Notdazzling.



Specifications

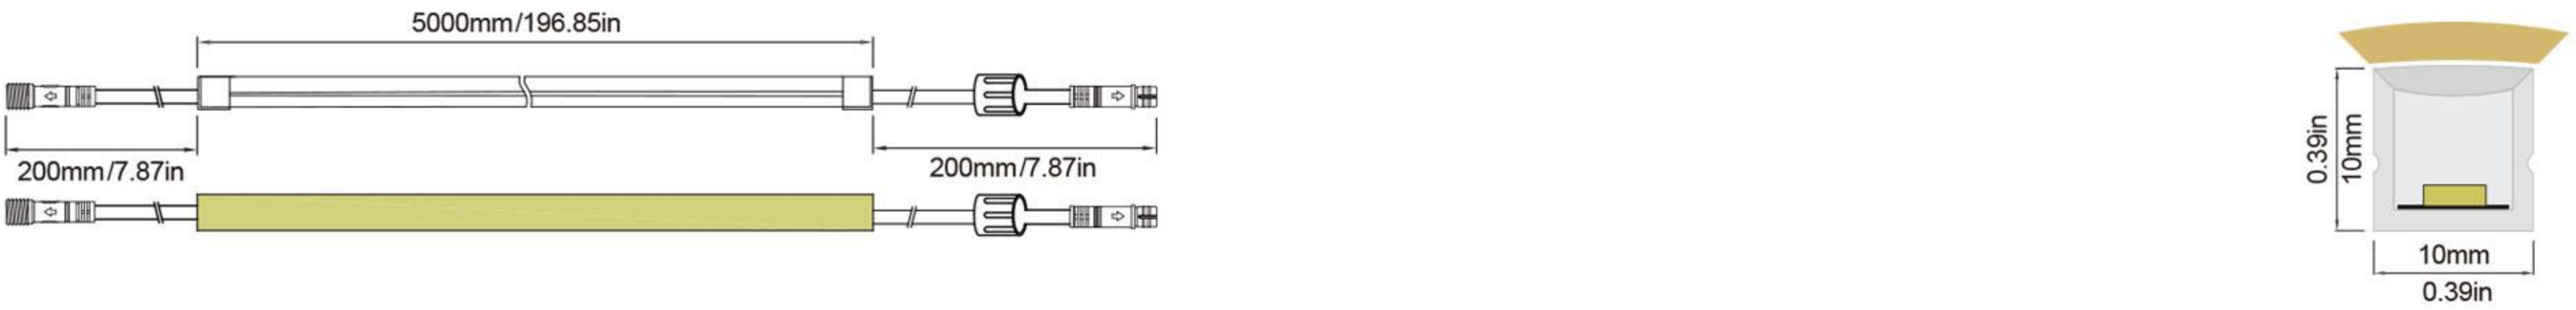

Installation Accessories


JA0026		6063 Aluminum Profile 1000*11.9*14mm
JK0018		6063 Aluminum Clip 30*11.9*14mm
JL0003		Flexible Stainless Steel Profile 1000*10.9*10.03mm
JK0014		304 Stainless Steel Clip 8*11.94*7.5mm
JD0003		End Cap Without Hole 12*12*8mm
DX0092 DX0097		M10 Male&Female Connector 2464 20AWG φ4.0 Cables

Application




Luminaire Photometric Data

Luminous intensity distribution diagram

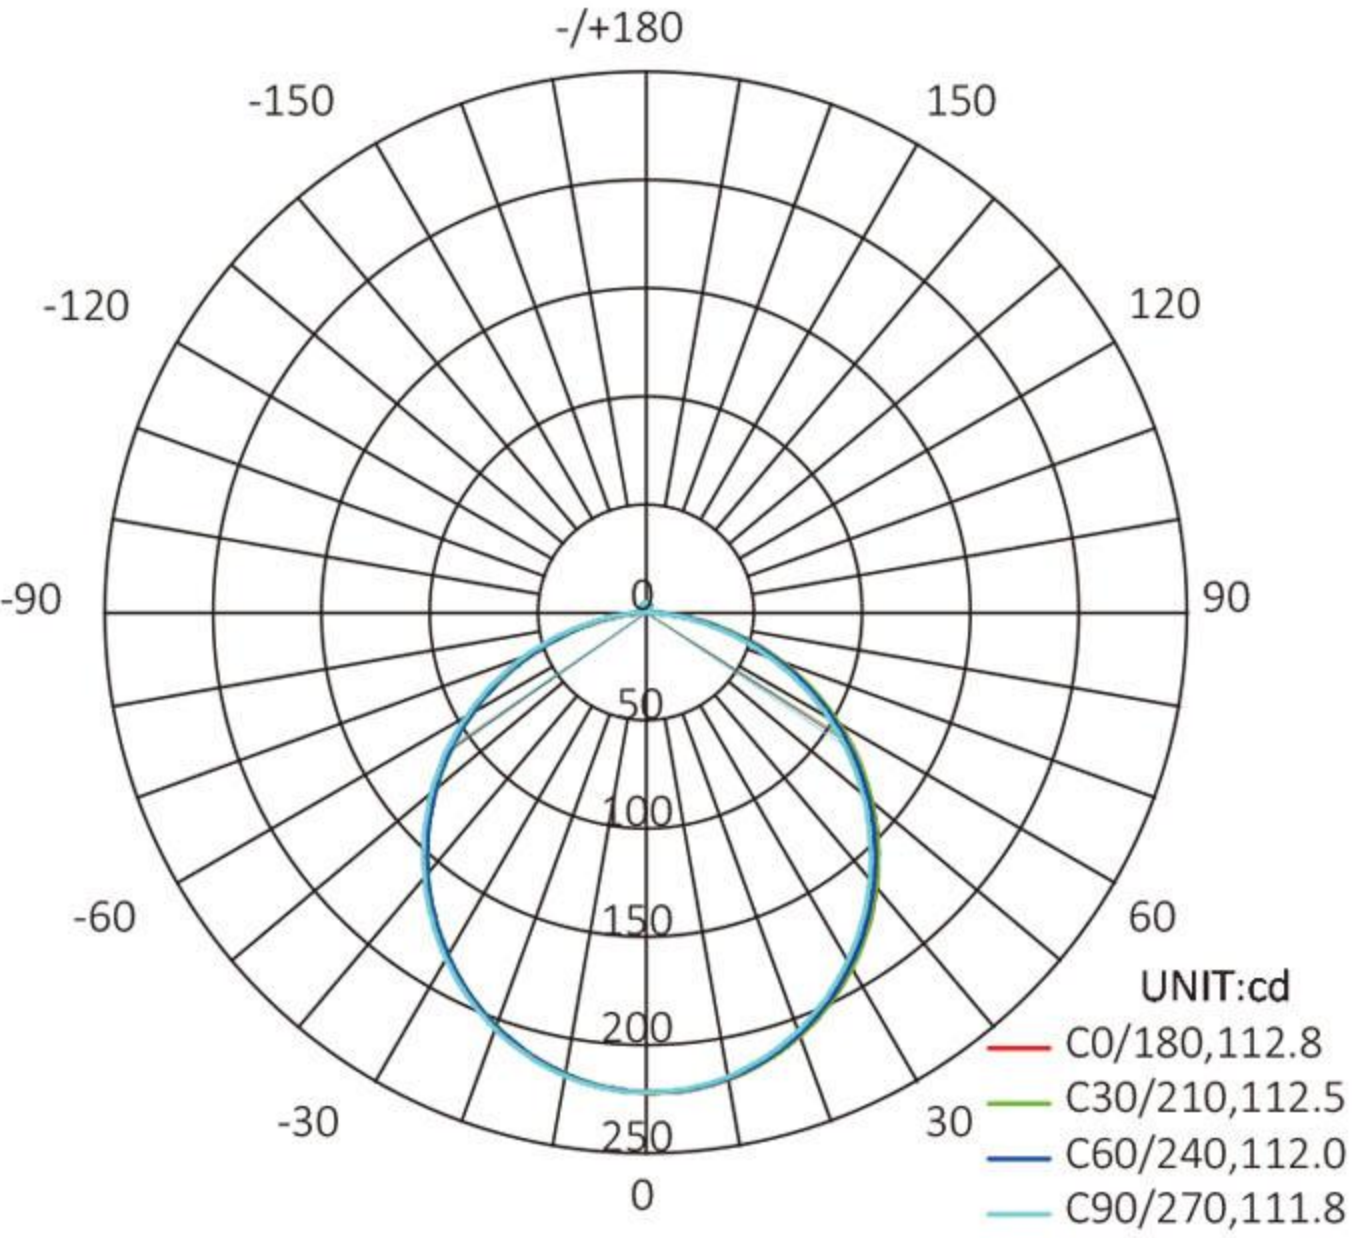


AVERAGE BEAM ANGLE(50%):112.3 DEG

Connection Methods

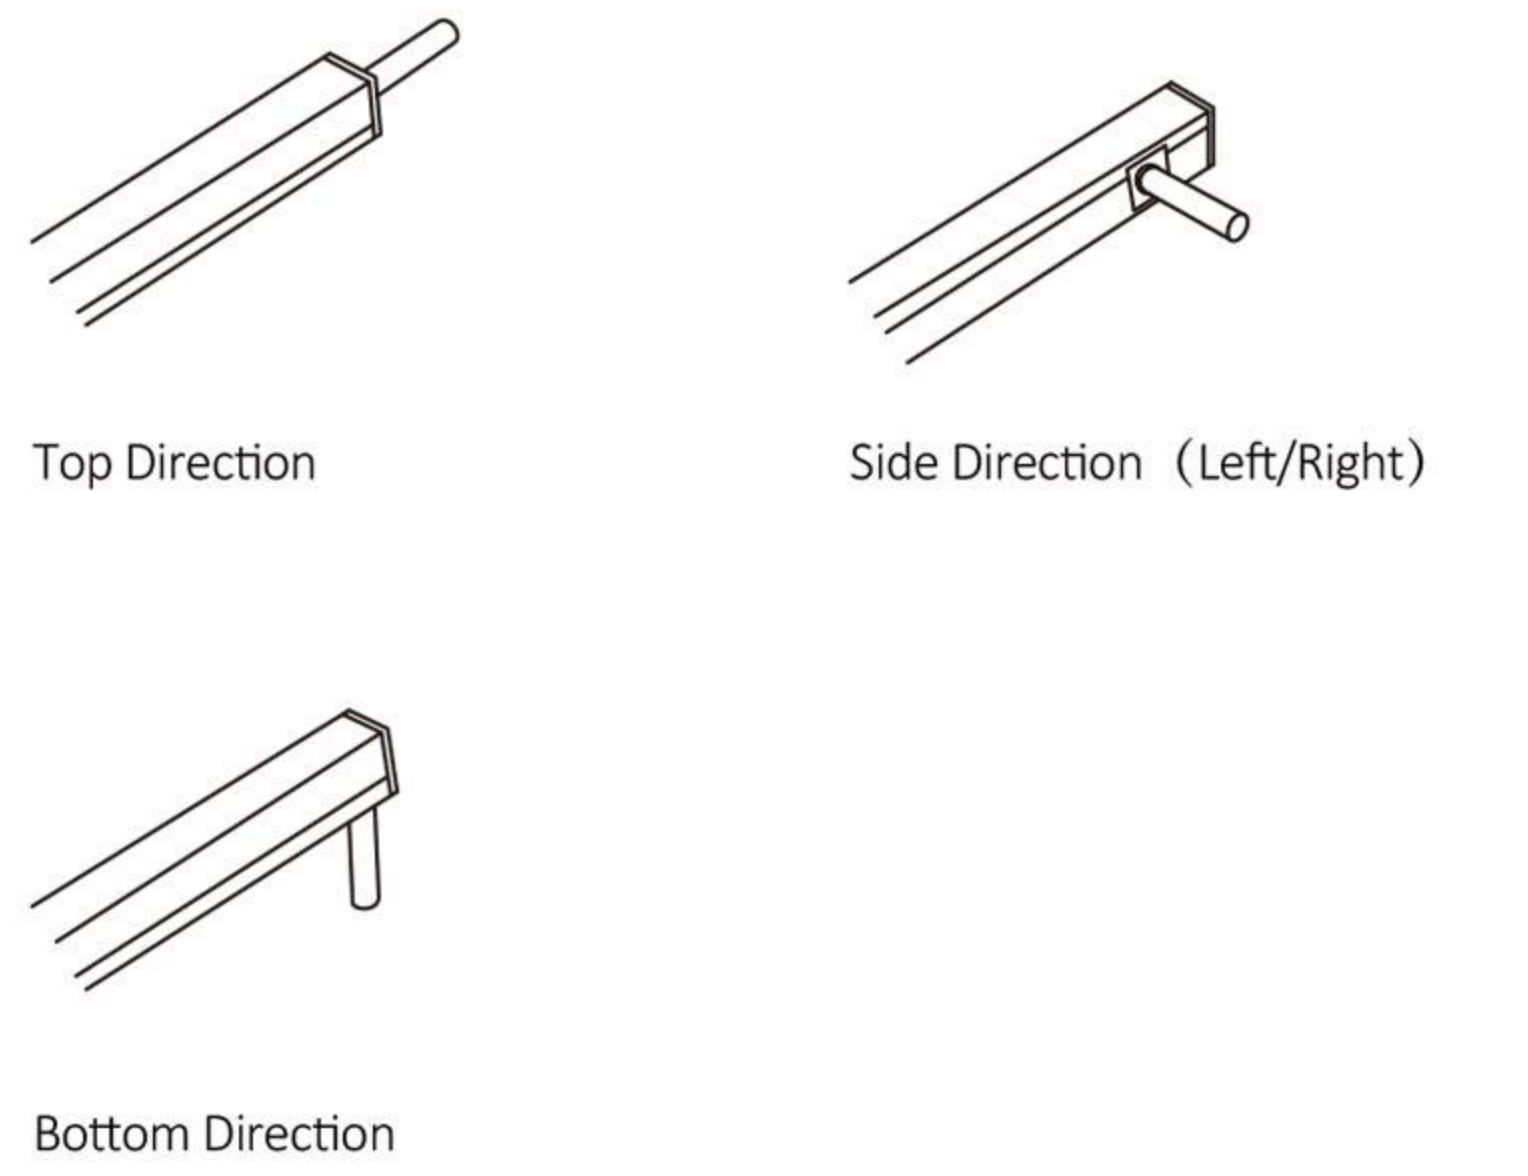

Datasheet

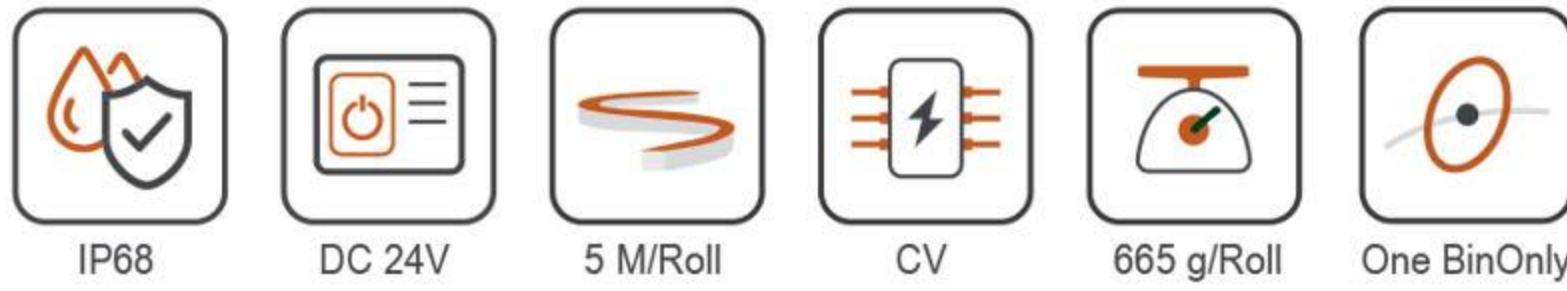

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27144C-AT	2700K	2835	144	2600-2800	10.0	700	90	41.67	6	12M
NF-C30144C-AT	3000K	2835	144	2850-3300	10.0	710	90	41.67	6	12M
NF-C40144C-AT	4000K	2835	144	3850-4400	10.0	720	90	41.67	6	12M
NF-C50144C-AT	5000K	2835	144	4800-5400	10.0	720	90	41.67	6	12M
NF-C65144C-AT	6500K	2835	144	5600-7000	10.0	710	90	41.67	6	12M
NF-CRE144C-AT	Red	2835	144	620-625nm	10.0	225	—	41.67	6	12M
NF-CGR144C-AT	Green	2835	144	520-525nm	10.0	289	—	41.67	6	12M
NF-CBL144C-AT	Blue	2835	144	460-465nm	10.0	163	—	41.67	6	12M
NF-CYE144C-AT	Yellow	2835	144	590-595nm	10.0	378	—	41.67	6	12M
NF-CPI144C-AT	Pink	2835	144	-	10.0	386	—	41.67	6	12M
NF-COR144C-AT	Orange	2835	144	600-610nm	10.0	208	—	41.67	6	12M
NF-CTW120C-AT	WW-CW	2835	120	2700-6500	2*8	465	90	50	6	10M
NF-GRG120C-AT	RGB	3535	120	RGB	12.0	323	—	50	6	7.5M