


LED Neon Flex Series

Side View-L: 16x15

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.




Specifications

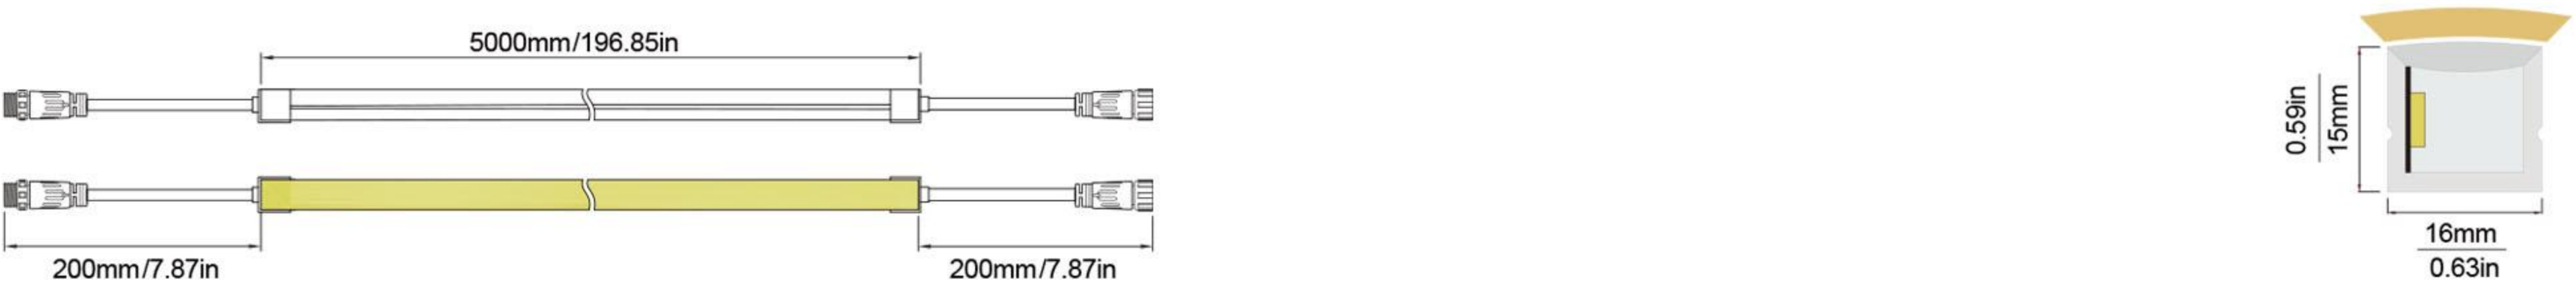


Installation Accessories

JA0004		304SS+6063AL Pop-Up Profile 1000*20.5*17.3mm
JK0006		304SS+6063AL Pop-Up Clip 40*20.5*17.3mm
JA0038		6063 Aluminum Profile 1000*19*21.5mm
JK0005		6063 Aluminum Clip 30*18.3*18mm
JL0004		Flexible Stainless Steel Profile 1000*17.3*16.44mm
JD0019		End Cap Without Hole 18.2*17.5*11.5mm



Application

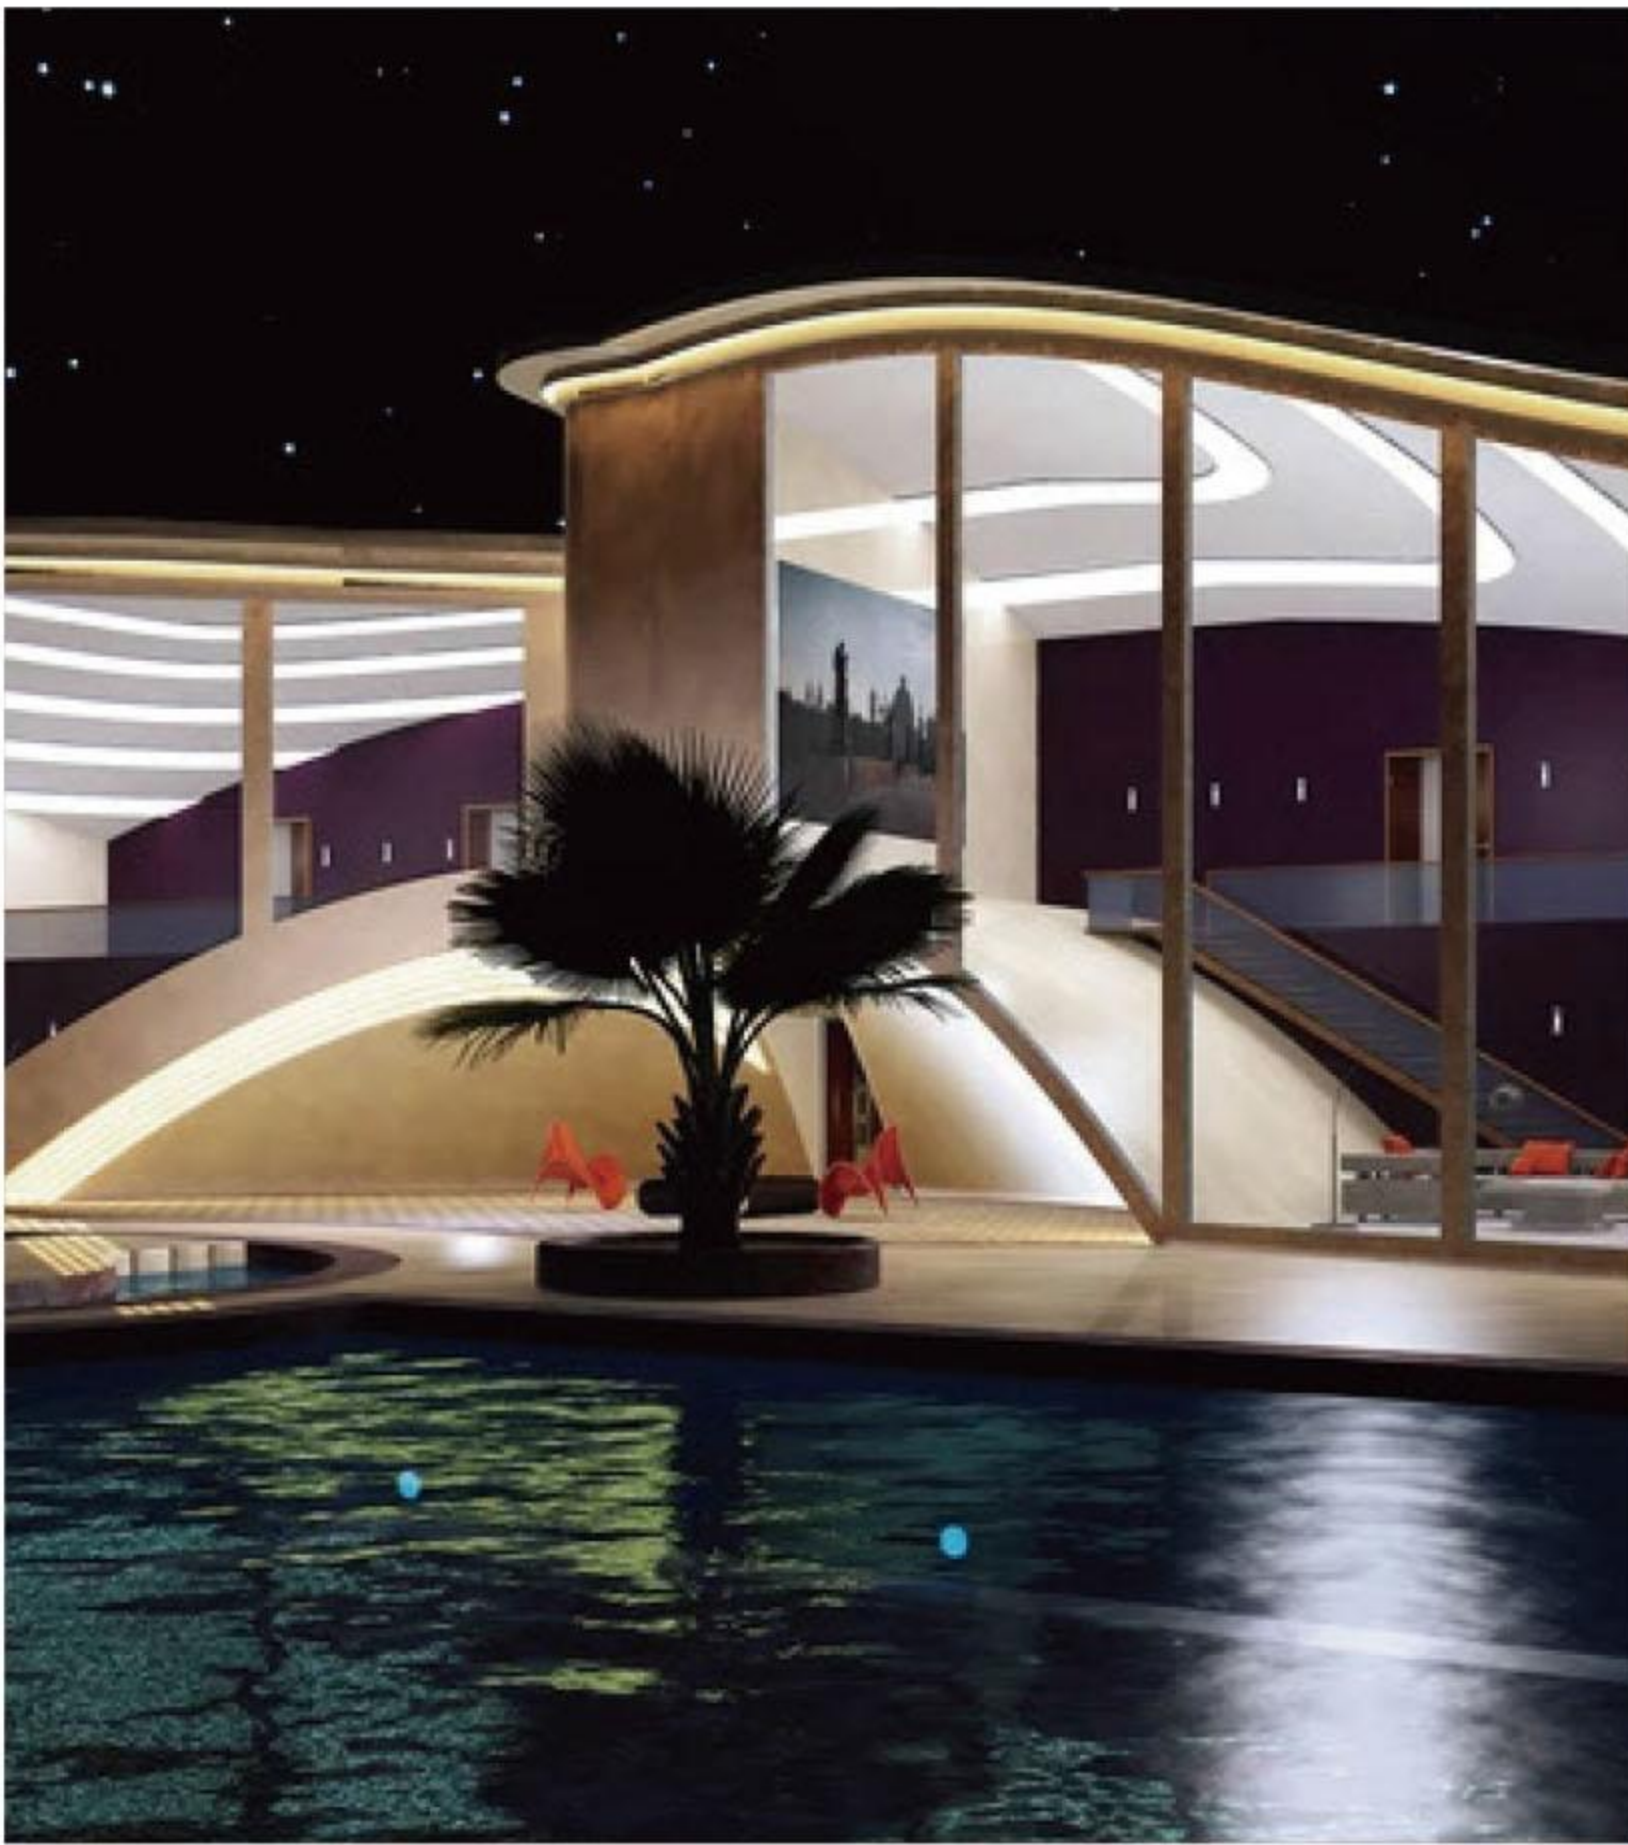

Connection Methods

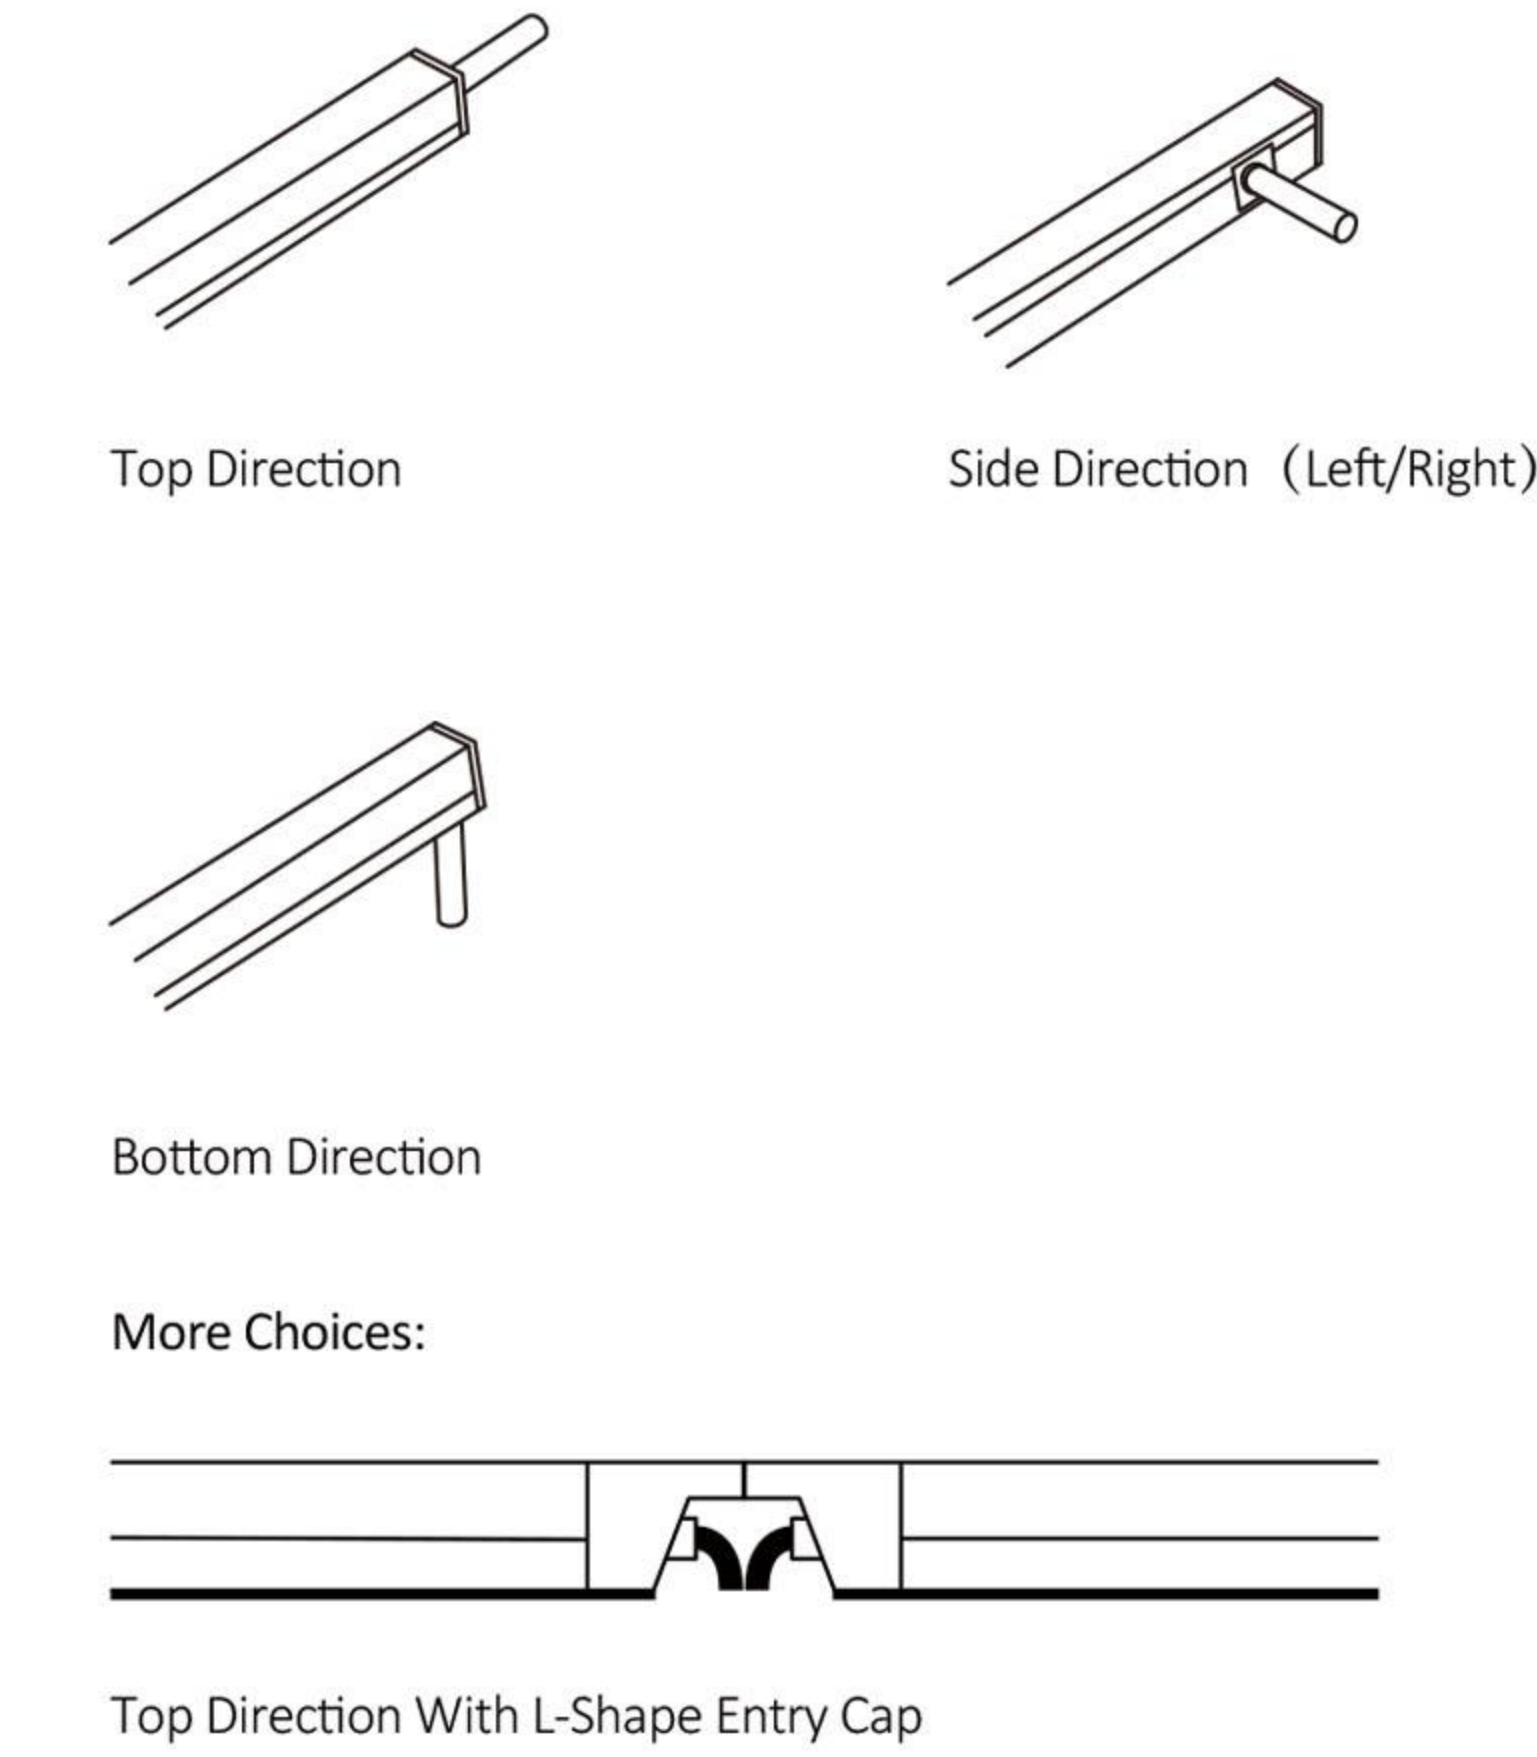

Luminaire Photometric Data

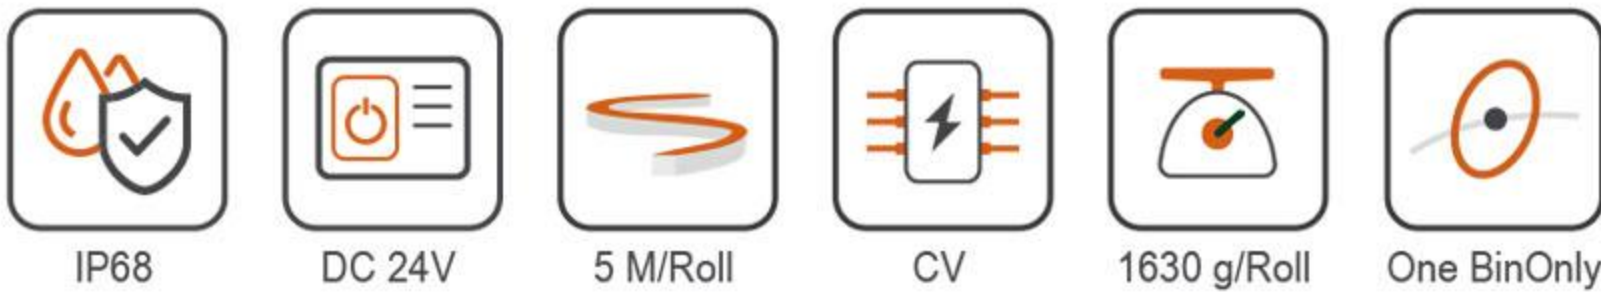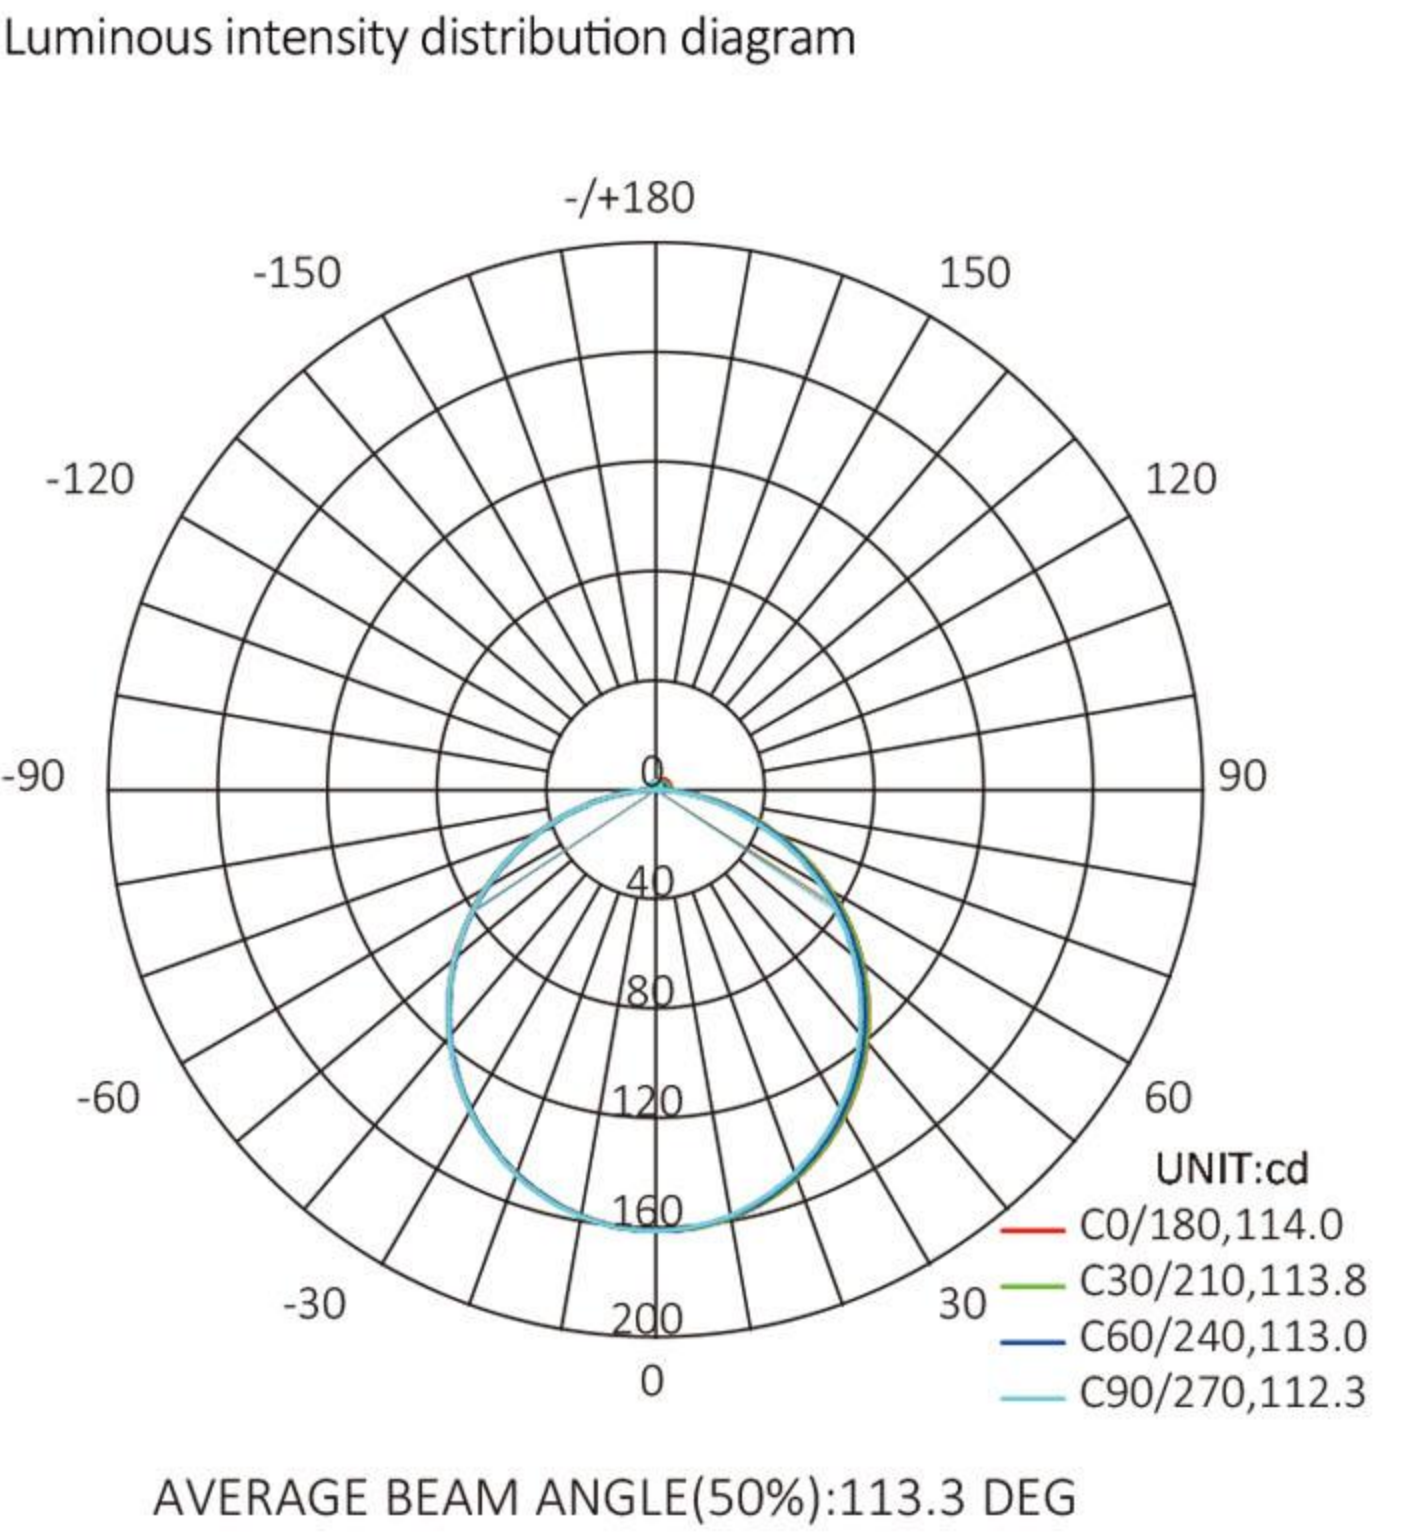

Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27140C-CS	2700K	2835	140	2600-2800	12.0	948	90	50	10	15M
NF-C30140C-CS	3000K	2835	140	2850-3300	12.0	960	90	50	10	15M
NF-C40140C-CS	4000K	2835	140	3850-4400	12.0	989	90	50	10	15M
NF-C50140C-CS	5000K	2835	140	4800-5400	12.0	997	90	50	10	15M
NF-C65140C-CS	6500K	2835	140	5600-7000	12.0	1008	90	50	10	15M
NF-CRE140C-CS	Red	2835	140	620-625nm	12.0	288	—	50	10	15M
NF-CGR140C-CS	Green	2835	140	520-525nm	12.0	383	—	50	10	15M
NF-CBL140C-CS	Blue	2835	140	460-465nm	12.0	204	—	50	10	15M
NF-CYE140C-CS	Yellow	2835	140	590-595nm	12.0	630	—	50	10	15M
NF-CPI140C-CS	Pink	2835	140	-	12.0	572	—	50	10	15M
NF-COR140C-CS	Orange	2835	140	600-610nm	12.0	258	—	50	10	15M
NF-CTW240C-CS	WW-CW	2835	240	2700-6500	2*8	631	90	50	10	12M
NF-GRG120C-CS	RGB	3535	120	RGB	12.0	388	—	50	10	10M