


LED Neon Flex Series

Side View-S : 10X10

High quality and high brightness SMD LED chip.
Environmentally friendly&ene rgy efficient.
High color consistency&smooth illumination With
invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

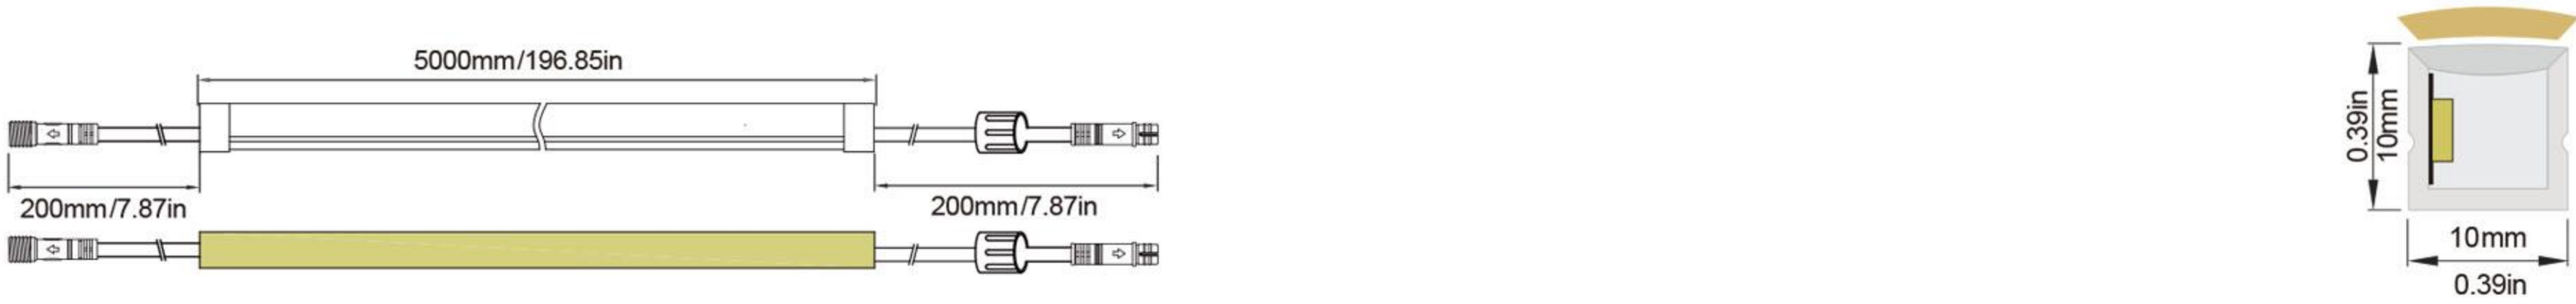

Installation Accessories


- JA0026 6063 Aluminum Profile 1000*11.9*14mm
- JK0018 6063 Aluminum Clip 30*11.9*14mm
- JL0003 Flexible Stainless Steel Profile 1000*10.9*10.03mm
- JK0014 304 Stainless Steel Clip 8*11.94*7.5mm
- JD0003 End Cap Without Hole 12*12*8mm
- JJ0009 K-5905 Glue Transparent 45g/PCS

Application




Luminaire Photometric Data


Luminous intensity distribution diagram

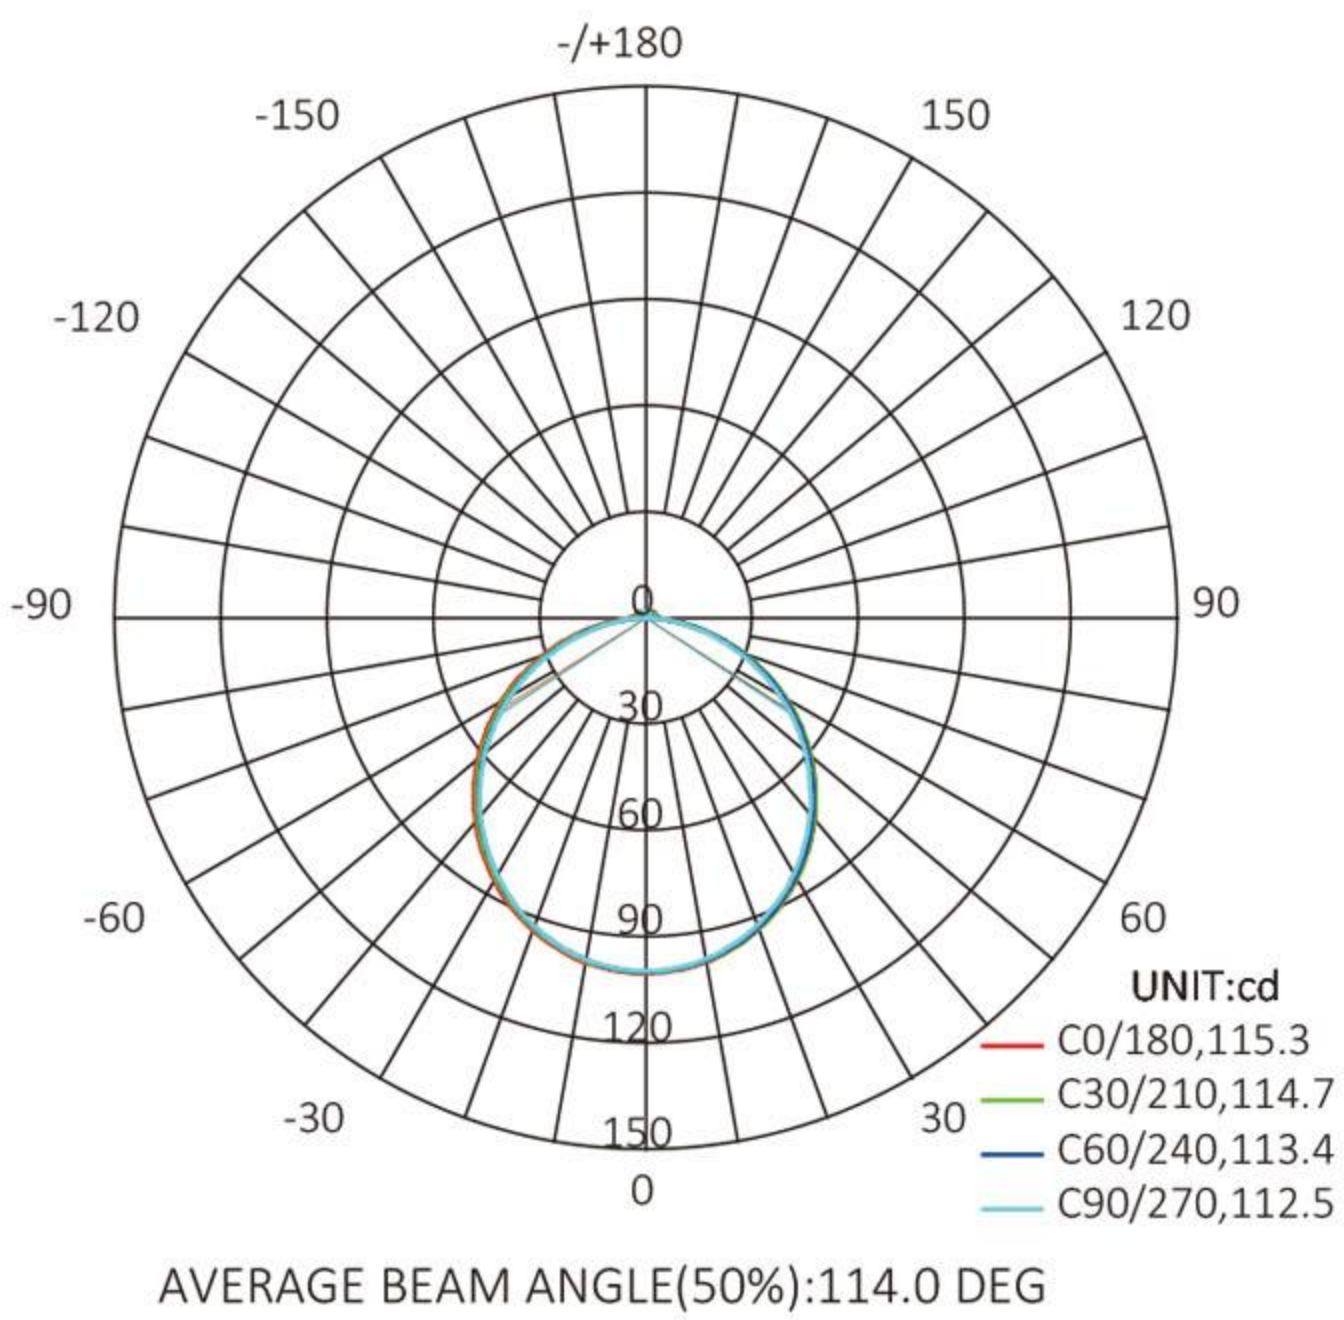

Connection Methods

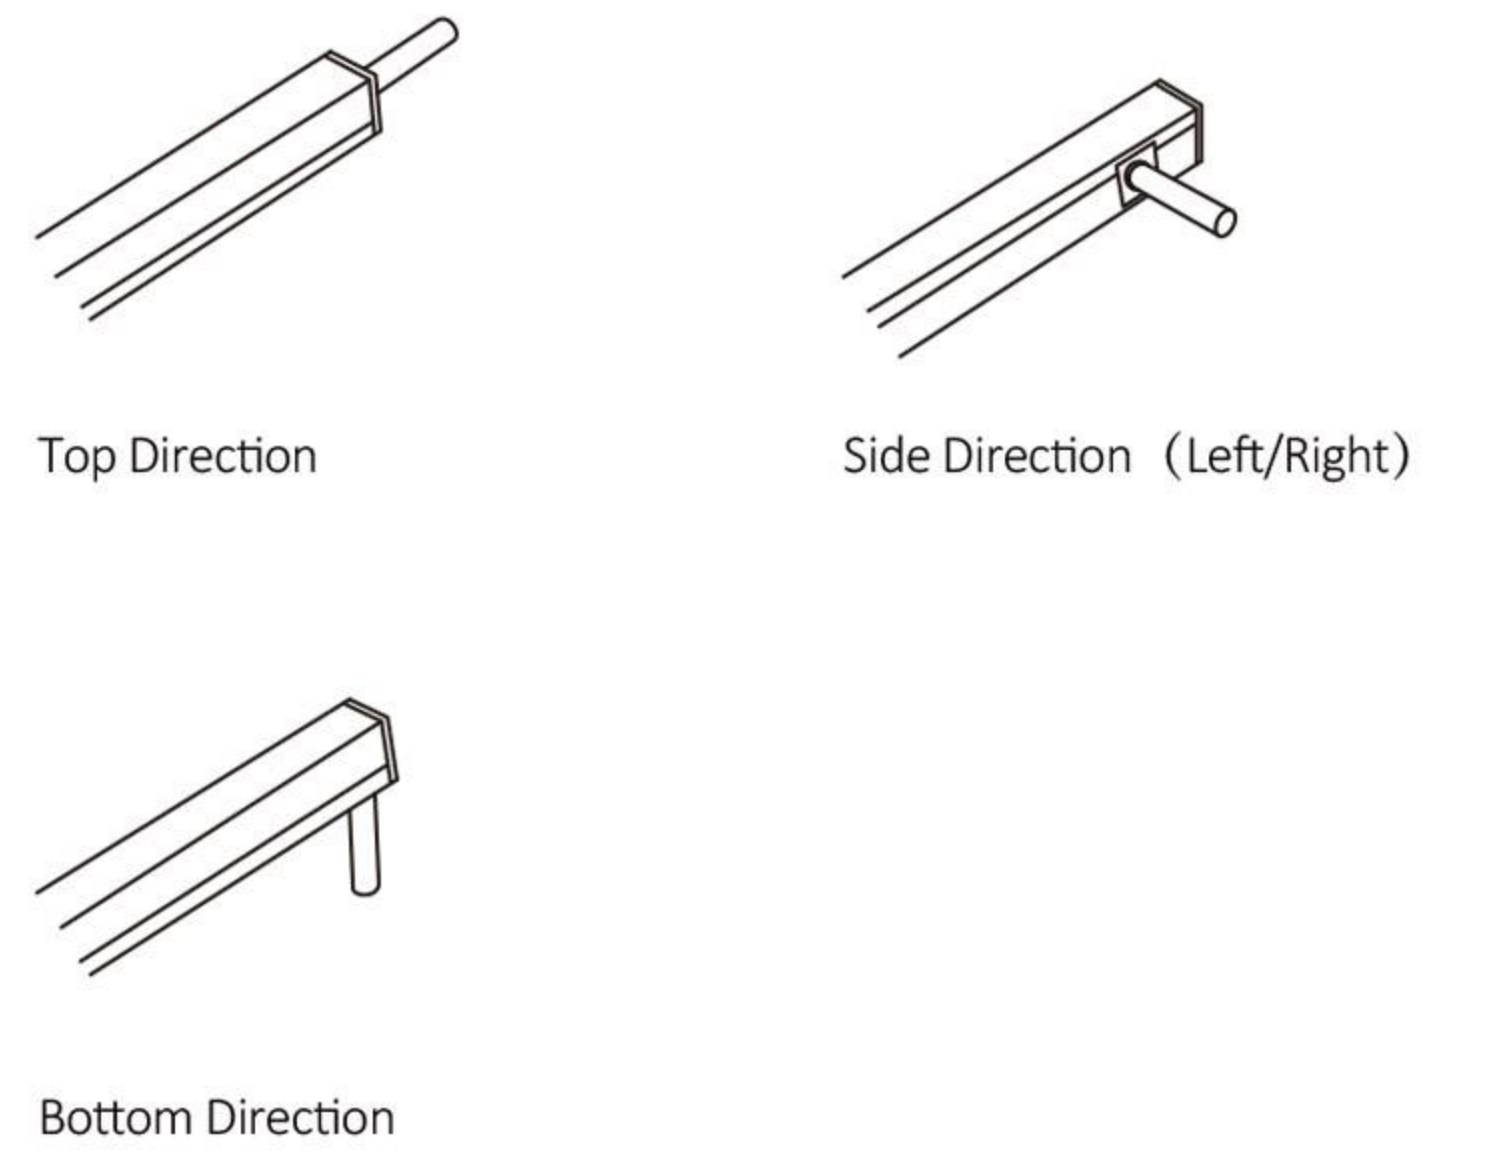

Datasheet

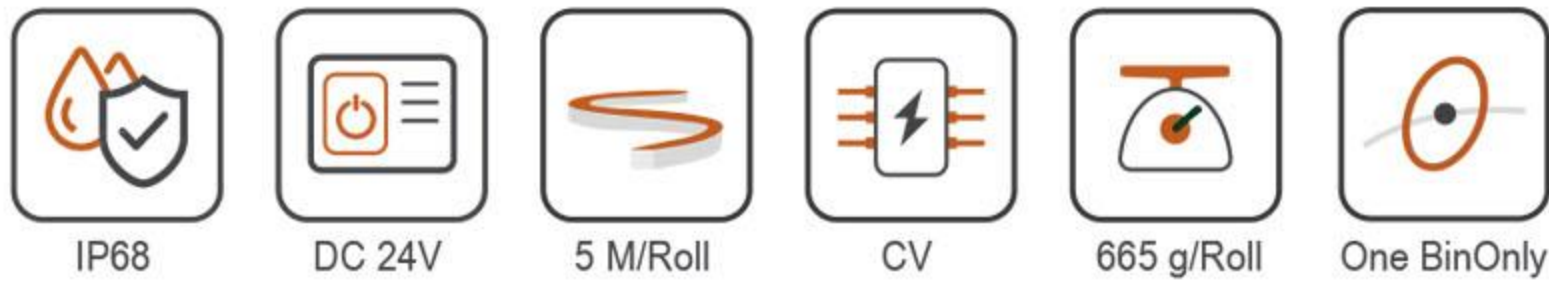

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27144C-AS	2700K	2835	144	2600-2800	10.0	560	90	41.67	6	12M
NF-C30144C-AS	3000K	2835	144	2850-3300	10.0	570	90	41.67	6	12M
NF-C40144C-AS	4000K	2835	144	3850-4400	10.0	575	90	41.67	6	12M
NF-C50144C-AS	5000K	2835	144	4800-5400	10.0	575	90	41.67	6	12M
NF-C65144C-AS	6500K	2835	144	5600-7000	10.0	568	90	41.67	6	12M
NF-CRE144C-AS	Red	2835	144	620-625nm	10.0	180	—	41.67	6	12M
NF-CGR144C-AS	Green	2835	144	520-525nm	10.0	232	—	41.67	6	12M
NF-CBL144C-AS	Blue	2835	144	460-465nm	10.0	134	—	41.67	6	12M
NF-CYE144C-AS	Yellow	2835	144	590-595nm	10.0	302	—	41.67	6	12M
NF-CPI144C-AS	Pink	2835	144	-	10.0	309	—	41.67	6	12M
NF-COR144C-AS	Orange	2835	144	600-610nm	10.0	166	—	41.67	6	12M
NF-CTW120C-AS	WW-CW	2835	120	2700-6500	2*8	372	90	50	6	10M
NF-GRG120C-AS	RGB	3535	120	RGB	12.0	258	—	50	6	7.5M