


LED Neon Flex Series

3-Face View-L: 16x15

High quality and high brightness SMD LED chip.
Environmentally friendly&energy efficient.
High color consistency&smooth illumination With invisible light dots.
Perfect softness,gentle emitting,Not dazzling.



Specifications

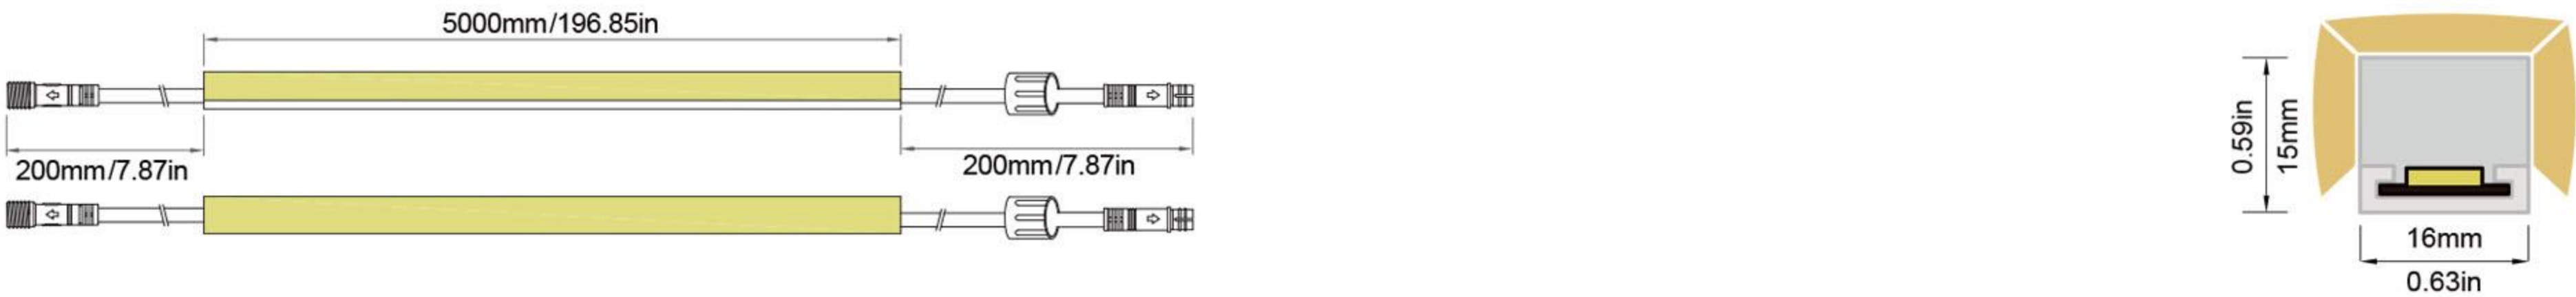


Installation Accessories

JA0175		PC Transparent Profile 1000*19.47*8.38mm
JK0057		PC Transparent Clip 30*19.47*8.38mm
JA0038		6063 Aluminum Profile 1000*19*21.5mm
JK0005		6063 Aluminum Clip 30*18.3*18mm
JL0004		Flexible Stainless Steel Profile 1000*17.3*16.44mm
JK0019		304 Stainless Steel Clip 15*17*8.8mm

Application





Connection Methods

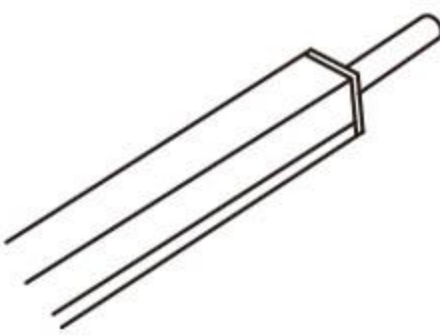

Top Direction

Luminaire Photometric Data

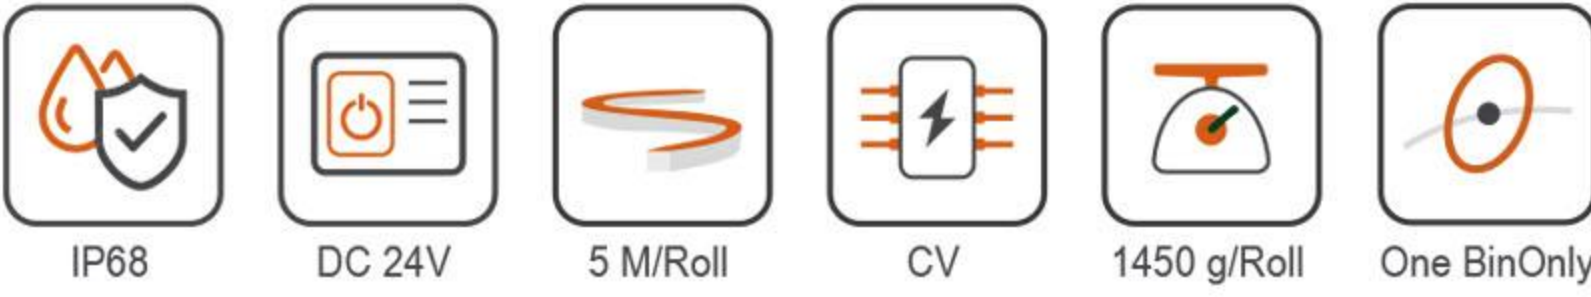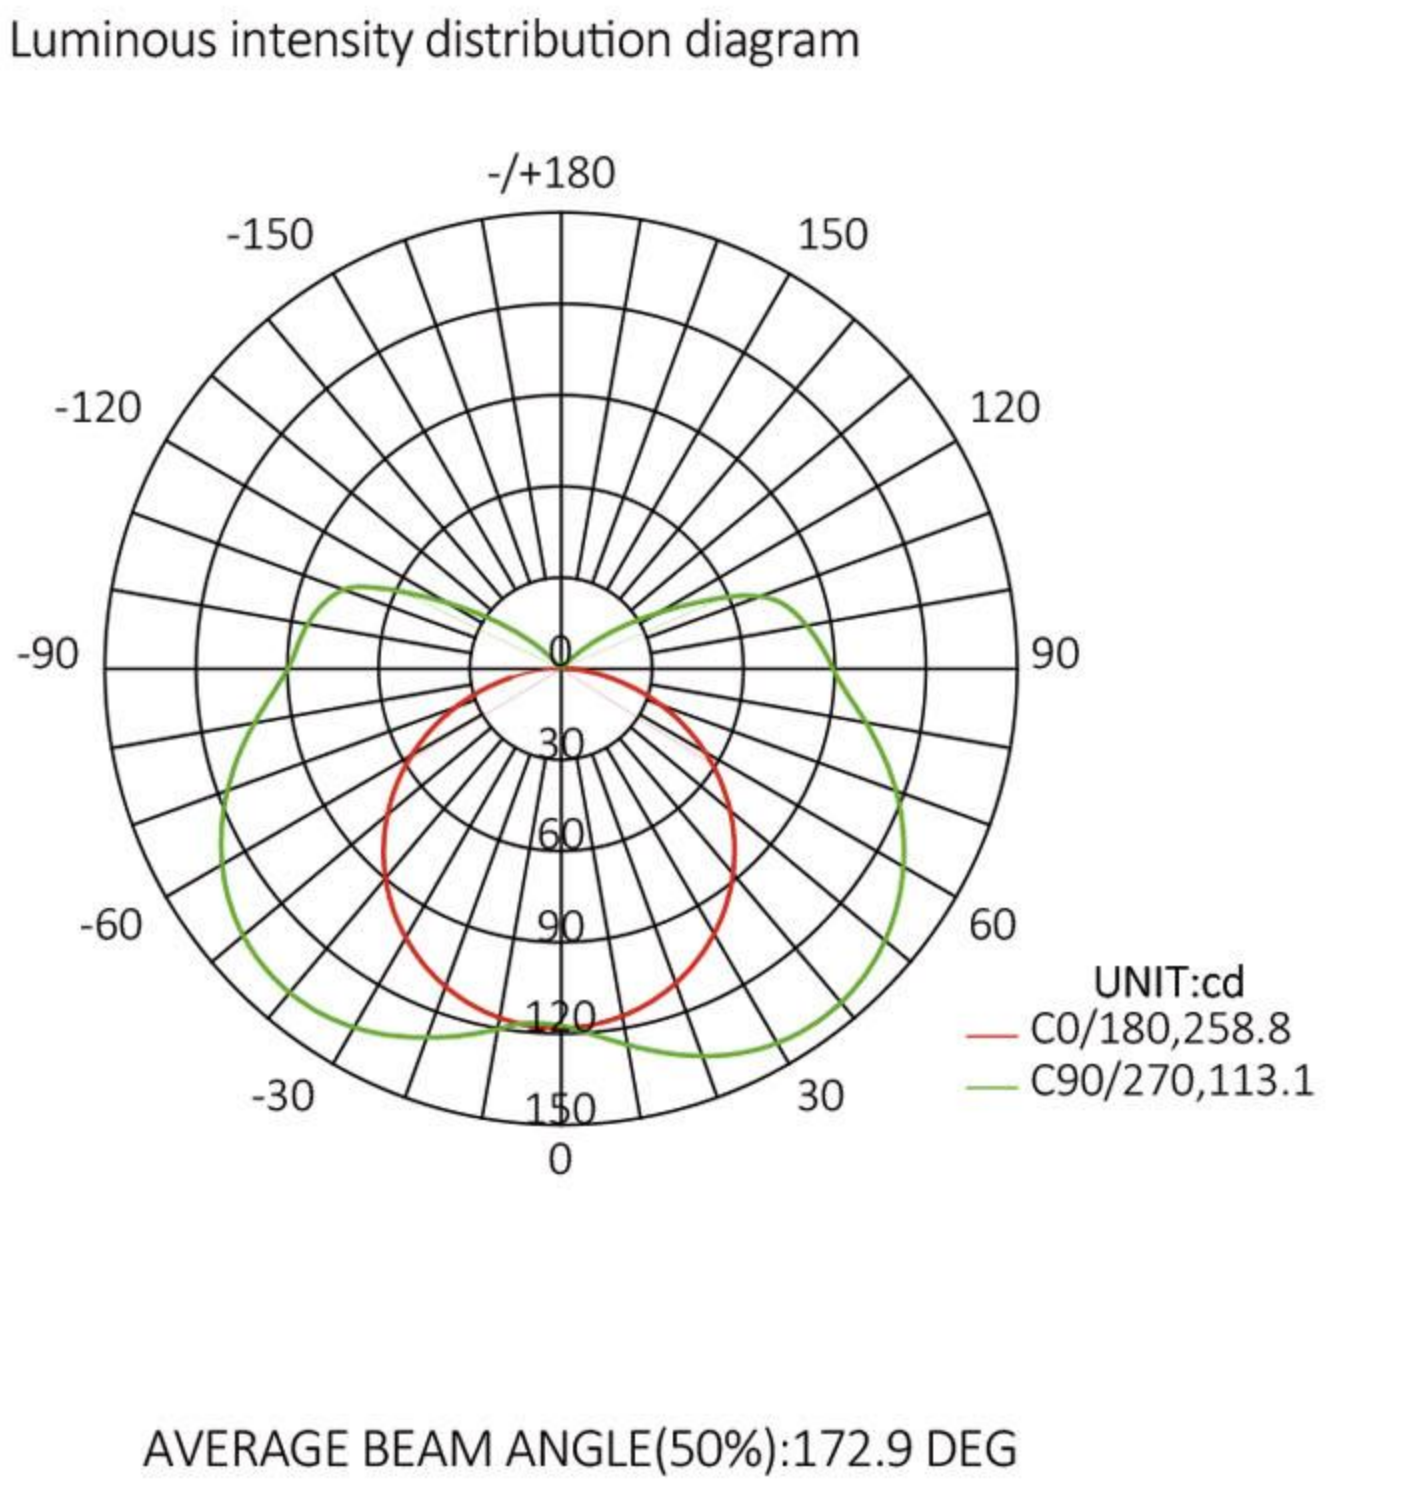

Datasheet

Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
NF-C27240C-CA	2700K	2835	240	2600-2800	12.0	788	90	25	10	15M
NF-C30240C-CA	3000K	2835	240	2850-3300	12.0	793	90	25	10	15M
NF-C40240C-CA	4000K	2835	240	3850-4400	12.0	802	90	25	10	15M
NF-C50240C-CA	5000K	2835	240	4800-5400	12.0	803	90	25	10	15M
NF-C65240C-CA	6500K	2835	240	5600-7000	12.0	799	90	25	10	15M
NF-CRE240C-CA	Red	2835	240	620-625nm	12.0	286	—	25	10	15M
NF-CGR240C-CA	Green	2835	240	520-525nm	12.0	363	—	25	10	15M
NF-CBL240C-CA	Blue	2835	240	460-465nm	12.0	181	—	25	10	15M
NF-CYE240C-CA	Yellow	2835	240	590-595nm	12.0	640	—	25	10	15M
NF-CPI240C-CA	Pink	2835	240	-	12.0	602	—	25	10	15M
NF-COR240C-CA	Orange	2835	240	600-610nm	12.0	239	—	25	10	15M
NF-CTW240C-CA	WW-CW	2835	240	2700-6500	2*10	635	90	50	10	12M
NF-GRG120C-CA	RGB	3535	120	RGB	14.0	478	—	50	10	10M
NF-HRW096C-CA	RGBW	5050	96	RGBW	16.0	602	—	62.5	12	7.5M
NF-HRW096C-CA	RGBW	5050	96	Pixel RGBW	18.0	458	—	62.5	12	7.5M