

Flexible LED Wall Washer Light


2835-56D-14MM-24V

Adopting PU glue material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility. so that it has strong adhesion, good durability and high reliability. It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.




Specifications

* 56LEDs/M

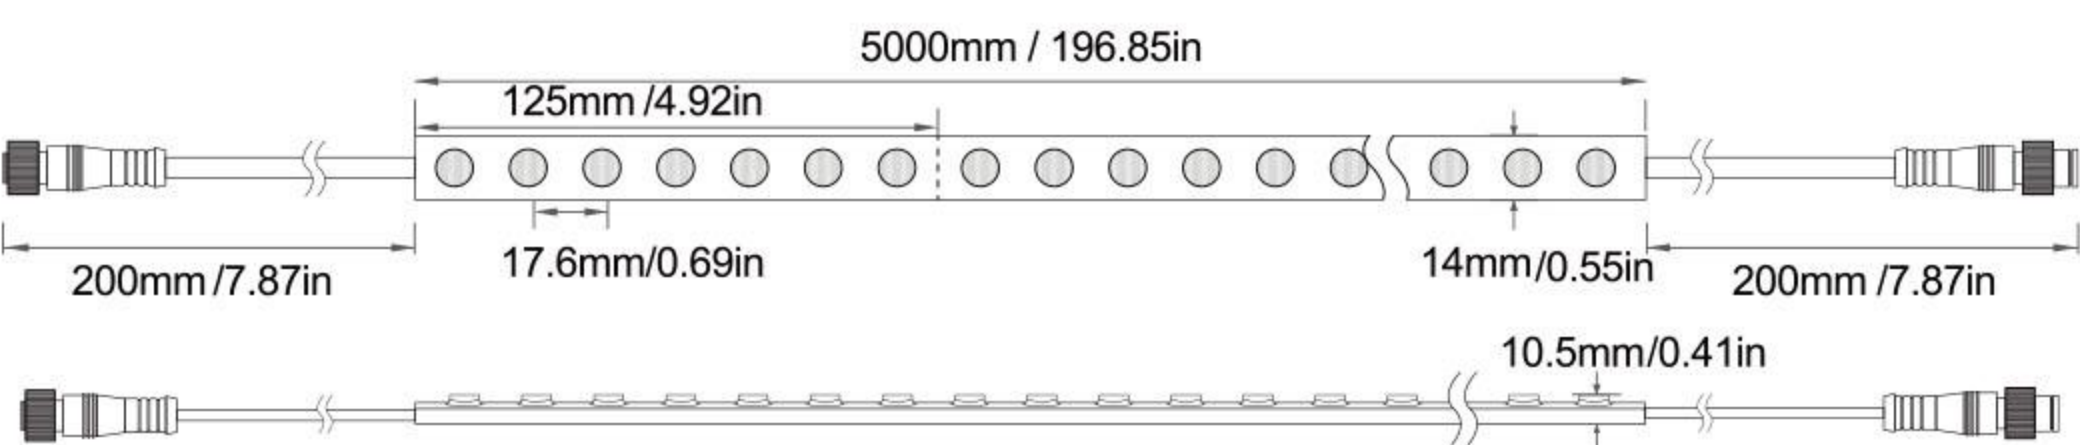


Beam Angle

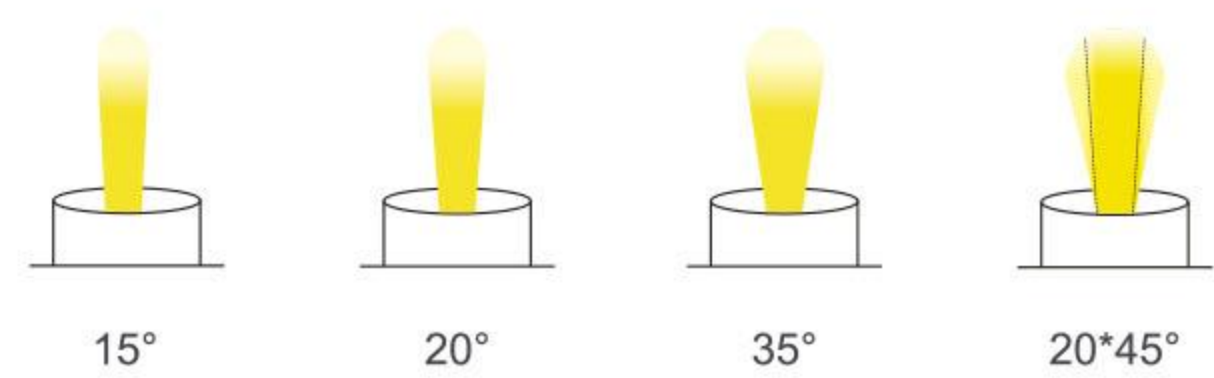

Datasheet


Model No.	Colour	LED Model	LEDs/M	CCT/ Wavelength	Power (W/M)	Lumens (lm/M)	CRI	Minimum Cutting Length(mm)	FPC Width (mm)	Maximum connection length
XF-C27056C	2700K	2835	56	2600-2800	10	920	80	125	11	15M
XF-C30056C	3000K	2835	56	2850-3200	10	930	80	125	11	15M
XF-C40056C	4000K	2835	56	3850-4200	10	950	80	125	11	15M
XF-C50056C	5000K	2835	56	4850-5250	10	950	80	125	11	15M
XF-C65056C	6500K	2835	56	6200-6800	10	940	80	125	11	15M

Installation Accessories

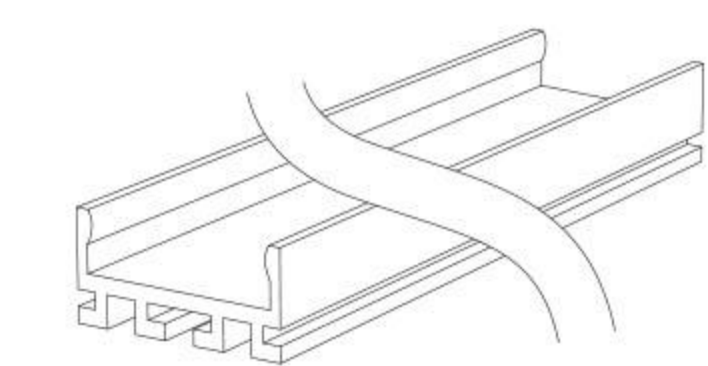


JA0176

6063 Aluminum Profile
1000*17*8mm

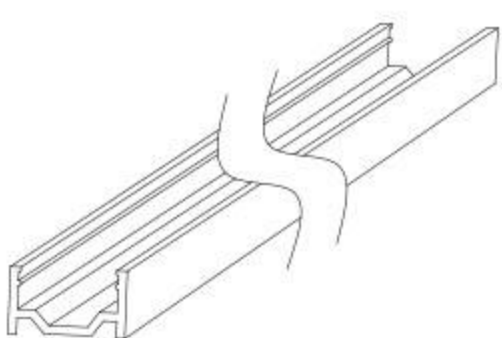


JA0025

PC Transparent Profile
1000*16*8.97mm




JK0038

PC Transparent Clip
20*16*8.97mm



JK0031

Silicone Clip
5.8*31*5.8mm



JD0026

End Cap Without Hole
10*16.5*6mm

Application



IP68



DC 24V



5 M/Roll



CV



655 g/Roll



One Bin Only